




INTIMAC S.R.L.
Via XXV Aprile, 8
21054 Fagnano Olona (VA) - Italia
Tel. +39 0331 1693557
email: inti@intisrl.it

Complete Lines Uhlmann UPS 1070 - C 2404

Images

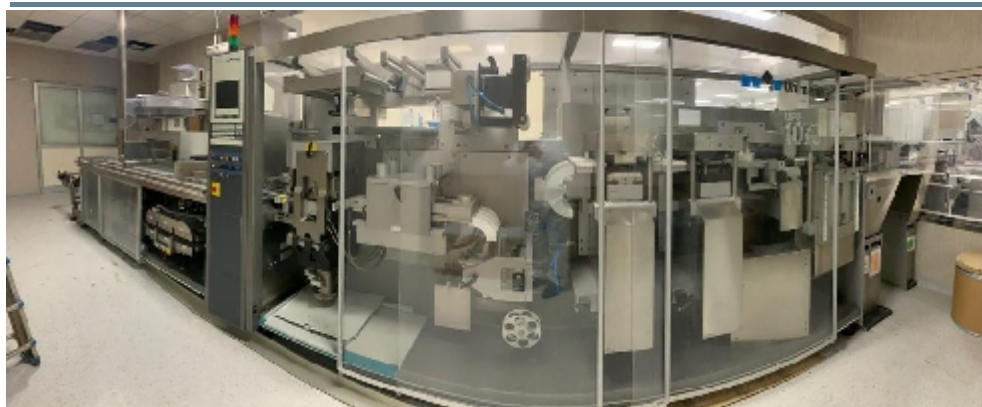



INTIMAC S.R.L.


Via XXV Aprile, 8
21054 Fagnano Olona (VA) - Italia
Tel. +39 0331 1693557
email: inti@intisrl.it





INTIMAC S.R.L.


Via XXV Aprile, 8
21054 Fagnano Olona (VA) - Italia
Tel. +39 0331 1693557
email: inti@intisrl.it

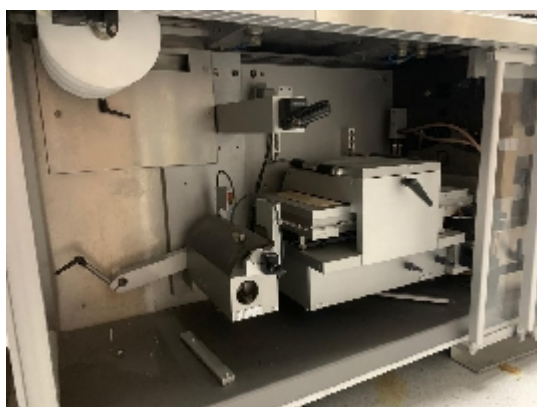



INTIMAC S.R.L.

Via XXV Aprile, 8
21054 Fagnano Olona (VA) - Italia
Tel. +39 0331 1693557
email: inti@intisrl.it

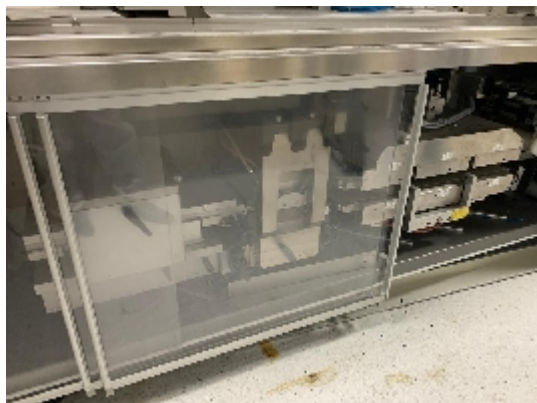



INTIMAC S.R.L.


Via XXV Aprile, 8
21054 Fagnano Olona (VA) - Italia
Tel. +39 0331 1693557
email: inti@intisrl.it





INTIMAC S.R.L.

Via XXV Aprile, 8
21054 Fagnano Olona (VA) - Italia
Tel. +39 0331 1693557
email: inti@intisrl.it

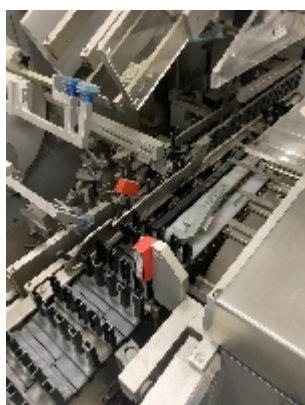



INTIMAC S.R.L.
Via XXV Aprile, 8
21054 Fagnano Olona (VA) - Italia
Tel. +39 0331 1693557
email: inti@intisrl.it



Product details

Category:	Complete Lines
Machine:	UPS 1070 - C 2404
Machine code:	LB259
Manufacturer:	Uhlmann
Year of construction:	2000

Description



INTIMAC S.R.L.

Via XXV Aprile, 8
21054 Fagnano Olona (VA) - Italia
Tel. +39 0331 1693557
email: inti@intisrl.it

Blister line Uhlmann: Blistering machine UPS 1070 - Cartoning machine C 2404

Blistering machine UPS 1070:

- Complete ELAU upgrade with 15" TFT TouchControl screen
- Complete mechanical overhaul
- Lateral web control forming film
- Cutting and splicing table
- Splice detection
- 3 zone heating station
- Berlex feeding boxes with product level control
- Safety flap
- Camera inspection for product, print position and product verification after sealing
- Lid foil unwind stand from the rear to include cut and splice table, splice detection (inside and outside), low level monitoring, reversing shoulder and lateral web control
- Sealing station
- Contact station
- Embossing station
- Punch station
- Vacuum belt outfeed
- Upgrade to main pneumatics with air dump valve

Technical data

Max. output: 1200 blister/min.

Foil width: min 150 mm, max 300 mm

ET index: min 130 mm, max 280 mm

MT index: min 30 mm, max 120 mm

Blisterlanes: max 3-lanes

Blister dimension length: min 30 mm, max 120 mm

Blister dimension width: min 60 mm, max 284 mm

Forming depth: max 10 mm (PVC foil) max 8/10 mm (Alu foil)

Cartoning machine C 2404

Year: 2000

Rated voltage: 3/PE AC 380 V, 80 Hz

Rated current: 7.5 A

Back-up fuse: 20 A