




Miscellaneous GUK FA 21/4-2K

Images



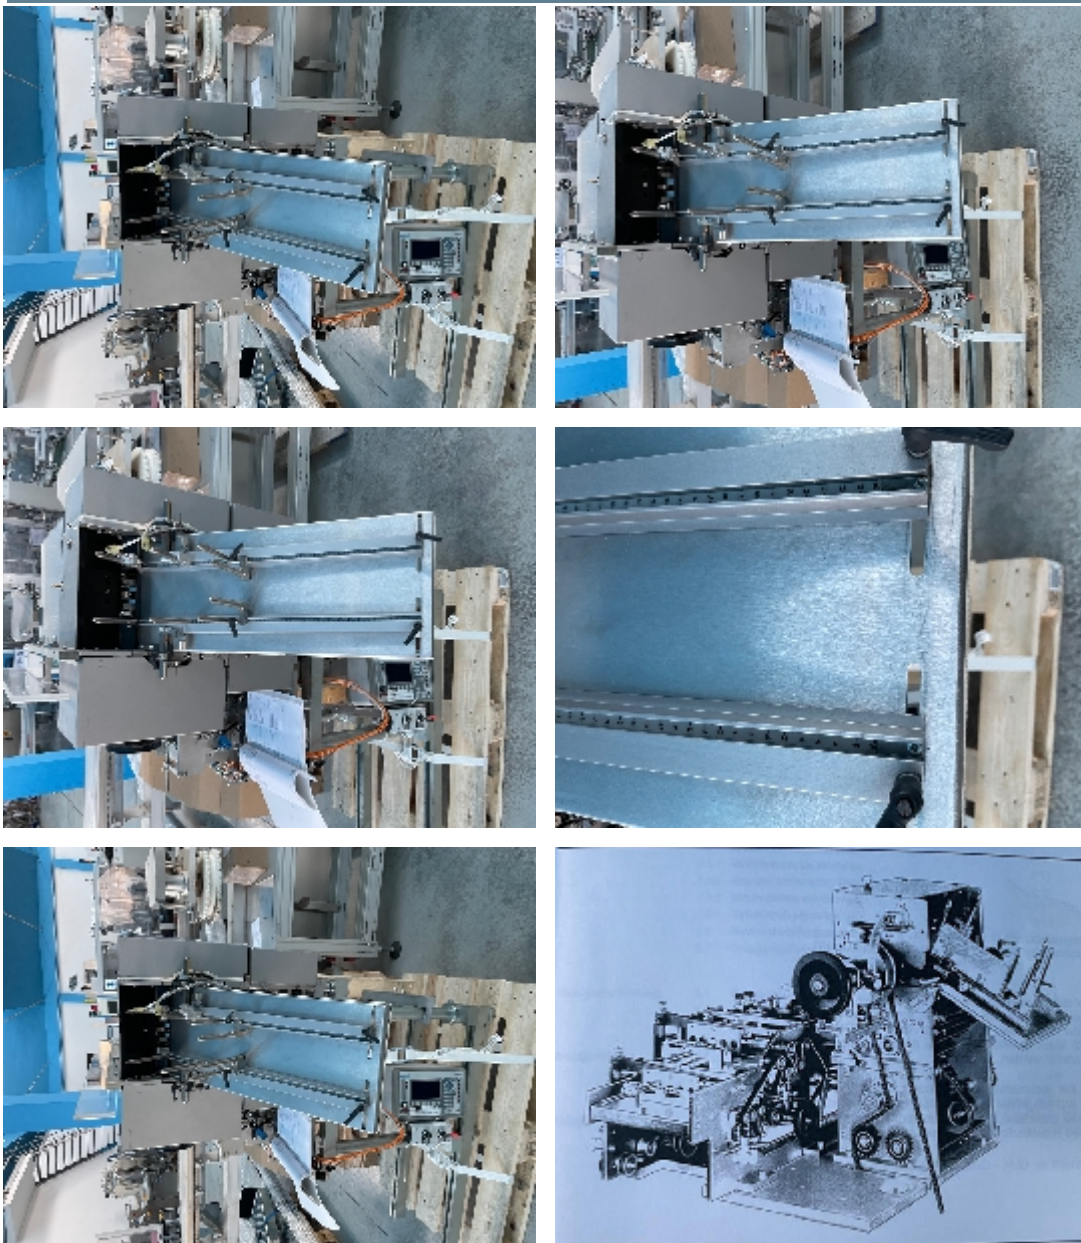

INTIMAC S.R.L.

Via XXV Aprile, 8
21054 Fagnano Olona (VA) - Italia
Tel. +39 0331 1693557
email: inti@intisrl.it

Product details

Category:	Miscellaneous
Machine:	FA 21/4-2K
Machine code:	IT485
Manufacturer:	GUK
Year of construction:	n/a

Description



INTIMAC S.R.L.

Via XXV Aprile, 8
21054 Fagnano Olona (VA) - Italia
Tel. +39 0331 1693557
email: inti@intisrl.it

Sheet formats :

Max feed in width : 210 mm

Minimum feed in width : 148 mm

Max feed in length: 320 mm

Max in special version : 650 mm

Minimum feed in length 90 mm

Smallest fold 30 mm

Folding possibility :

Station I : 4 folding pockets for 1-4 parallel folds

Station II : 2 folding knives for 1-2 knife folds

Paper Weight

Recommended paper weight: 45-70 g/m²

Capacity

Leaflet length below 320 mm – up to 200/min

Leaflet length above 320 mm- up to 150/min

Drive

From the cartoning machine - via a chain

Noise pressure level : 80 dB (A) (Without sound insulation)

Dimensions / weight

Length x width x height 0,963 x 0,998 x 0,619 m

FA21/4 – 2K Folding unit – approx. 200 kg

Paper specifications :

The following demands relating to paper quality and paper storage apply in the case of thin papers in order to allow fault- free operation :

Material : wood-free matt, glazed thin printing paper

Paper weight: 40-80 g/m²

Thickness (Din 53105, part 1) – 55 um (52-58)

Format : as required, e.g 21x30 cm / four-sided angled guillotine cut / on four sides +/-0,5 mm

Fibre direction for paper

From 40-80 g/m² : 90° towards folding edge

Porosity (Bendtsen) : 60 ml/min (30-90)

Smoothness/sec. in accordance with BEKK : 60 (30/90)

Relative assimilation humidity 52 % (46/58), 20°

Ash : 15 % (13/17)

Brightness DIN 53145 , Part 2 : 75

Opacity : 75

Luminance (ciba – geigy scales) : 6

Double folds 150 means value both LR

Flexural STRENGTH IN 7 Mn mean value / accordance with 2-points: longitudinal – horizontal (method DIN 53122)

Storage: In piles, sealed air tight in film, with same format cover and base card (1 mm)

Static charging: in order to avoid static charging, the sealed paper piles must be stored in refrigerators and not removed until shortly before they are used .